

HIGH PERFORMANCE LED FLASHLIGHT

T25 series



- World-class super bright Cree XR-E LED
- Auto-memorization of the current level when powering off
- Ergonomic design with solid structure for easy operation
- Hard finish with Type III anodization
- High Standard as MIL-STD-810F
- Water resistant, anti-shattering, anti-scratching and anti-rolling

The OLIGHT T25 Series is a high quality professional LED flashlight. Using Cree super bright LED; Unique digital circuit control technique; Auto-memorizing current level when power is off; Aircraft grade aluminum body, Type III anodization; O-ring sealed and high transparent anti-shattering optical lens; It provides you with light weight super bright tactical light source. Ideal for use in self-defense, mounting on weapons or general industrial, household, out-door recreation like boating, camping. Wherever you need a powerful light, it will be ready to go.

Specification


1. Led type:Cree 7090 XR-E
2. Output Characteristics

Model	Modes				
	Level 1/runtime	Level 2/runtime	Level 3/runtime	Level 4/runtime	Level 5/runtime
<input type="checkbox"/> T25 Regular	6lm/80hrs	15lm/33hrs	45lm/12hrs	90lm/5hrs	190lm/1.5hrs
	Strobe/2hrs	SOS _(LOW) /40hrs	SOS _(HIGH) /3hrs		
<input type="checkbox"/> T25 Tactical	6lm/80hrs	45lm/12hrs	190lm/1.5hrs	Strobe	SOS

3. Battery
Uses 2 * AA batteries; compatible with 2*1.2V Rechargeable AA batteries;
4. Size and Weight
T25 Regular:
Size: 152.8mm(L) x25mm(D); weight: 90g;
T25 Tactical:
Size: 155.8mm(L) x25mm(D); weight: 90g;
5. Accessories
One holster, one lanyard, two spare O-rings and one rubber boot;

Instruction

1. Install the batteries as shown in the figure

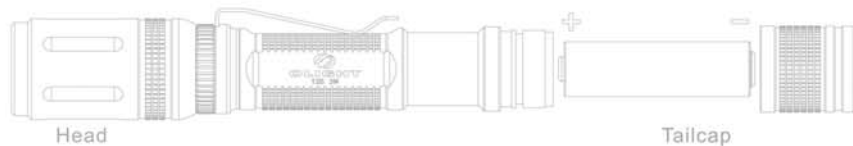

Warning: misplacing the batteries may damage the flashlight

2. The function of Tailcap push button
T25 Regular: The Push Button on the tailcap serves two functions: Fully Press (Click) will turn light On/Off. Soft Press will change modes. When turned on, the default mode is illumination mode; one soft press will change to Strobe mode; another soft press will change to SOS mode.
T25 Tactical : Has both momentary and constant on functions. A gentle press will activate the momentary function, a full press (click) will lock the light on, another full press will Turn the light off.
3. Different Levels Operation
Twist the head for different levels:
T25 Regular : Twist the head of the flashlight in illumination mode can switch brightness among five levels (Turn the head of the light 1/8 of a turn clockwise and then back 1/8 of turn counte clockwise). Meanwhile, the brightness level will be recorded automatically when turning on again.
T25 Tactical : Twist the head of the flashlight for low, medium, high brightness levels, Strobe and SOS. Also, the brightness level or mode will be recorded automatically when turning On again.